
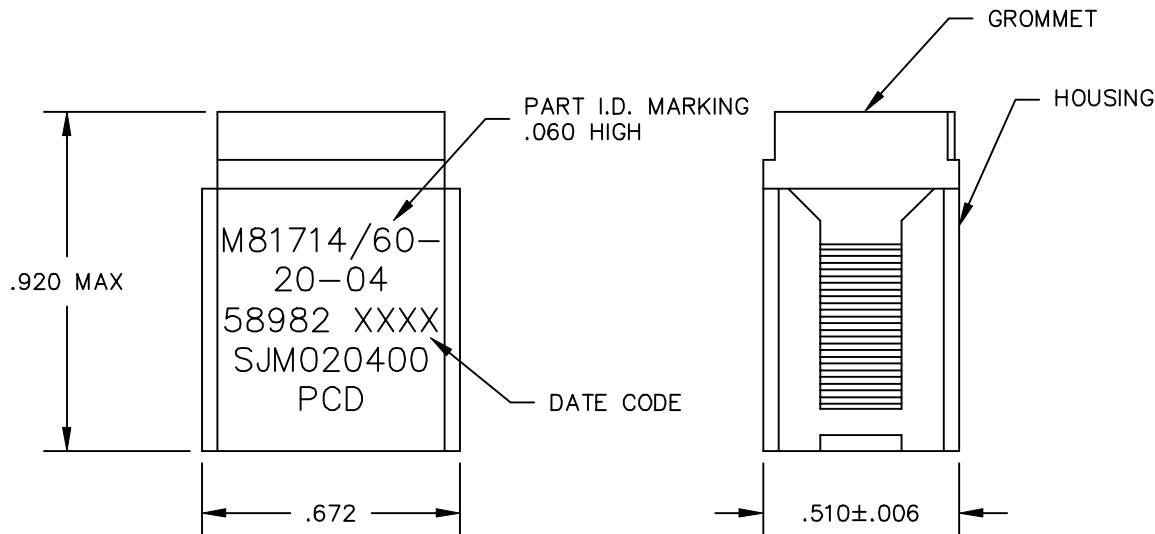


REV	ECN	APP'D
G	2448	
H	3963	

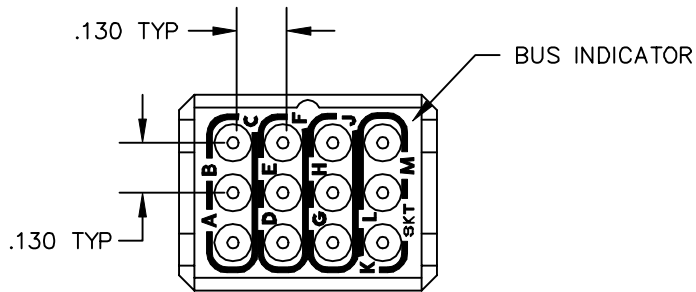

NOTES:

- MATERIALS:**  
 BODY: POLYETHERIMIDE PER MIL-P-46184.  
 GROMMET: SILICONE BLEND ELASTOMER.  
 CONTACT RETAINERS: BERYLLIUM COPPER.  
 INTERNAL PIN CONTACTS: COPPER ALLOY,  
 HARD GOLD PLATE PER MIL-G-45204.
- PERFORMANCE SPECIFICATIONS:**  
 OPERATING TEMP: -65° TO 200°C  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN @ 25°C  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 15000 VRMS AT SEA LEVEL  
 AND 200 VRMS AT 110,000 FT. ALTITUDE.  
 CURRENT RATING: 7.5 AMPS.  
 VIBRATION AND SHOCK: PER MIL-T-81714,  
 PARAGRAPH 3.5.5 AND 3.5.8.
- MODULE SUPPLIED WITH THIRTEEN (13) M39029/22-192 SOCKET CONTACTS AND TWO (2) MS27488-20 SEALING PLUGS.**

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ± .XXX ±.010 ANGLES ±2°	PROJECTION 	<i>SPECIFICATION DRAWING</i>			TITLE SOCKET JUNCTION MODULE SIZE 20 - 4-BUS M81714/60-20-04	
			ENGR A. PATRIE 4/19/00				
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF PCD, INC. PEABODY, MA, USA	CHKD		SIZE A	DWG NO. SJM020400		REV H
		APPD		CODE: 58982	SCALE: 2:1	SHEET 1 OF 1	